

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number  
**WO 2005/038354 A1**

(51) International Patent Classification<sup>7</sup>: **F24C 15/32**

[KR/KR]; H-324 Lifecenter, LG Electronics, Gaeom-jeong-dong, Changwon-si, Kyungsangnam-do 641-711 (KR).

(21) International Application Number:  
PCT/KR2004/002631

(74) Agent: **HAW, Yong-Noke**; 8th Fl. Songchon Bldg., 642-15 Yoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(22) International Filing Date: 15 October 2004 (15.10.2004)

(25) Filing Language: Korean

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GI, GM, GR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SI, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
10-2003-0072118 16 October 2003 (16.10.2003) KR

(71) Applicant (for all designated States except US): **LG ELECTRONICS, INC.** [KR/KR]; 20 Yoido-dong, Yongdunpo-gu, Seoul 150-875 (KR).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LEE, Duck-Gil**

[Continued on next page]

(54) Title: AIR FLOW PASSAGE OF MICROWAVE OVEN

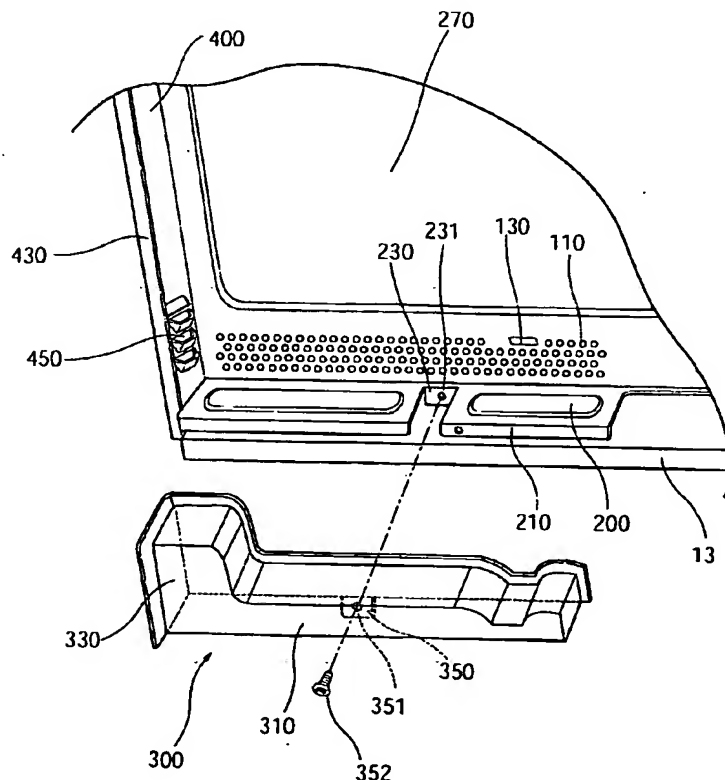

(57) Abstract: Provided is an air flow passage of a microwave oven including: a cavity for accommodating foods therein; an electric component chamber disposed at a predetermined portion of the cavity; a suction hole formed at one sided portion of the cavity such that the cavity communicates with the electric component chamber; an exhaust hole formed at the other sided portion of the cavity, through which air sucked through the suction hole is exhausted; an exhaust guide covering an outer wall of the cavity where the exhaust hole is formed, for guiding air exhausted through the exhaust hole to an outside of the microwave oven; and a back plate having an exhaust passage hole communicating with one end of the exhaust guide, through which air is exhausted. According to the present invention, hot air of an inside of the microwave oven can be smoothly exhausted. In particular, since the exhausted air does not return to the electric component chamber, cooling efficiency can be enhanced.

WO 2005/038354 A1

**WO 2005/038354 A1**

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LI, MC, NI, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*